



# WIDE BAND MEDIUM POWER AMPLIFIER

## MBM0218G1822

### FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction

### APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



### ELECTRICAL SPECIFICATIONS@25°C:

| Parameter                    | Min | Typical | Max   | Units |
|------------------------------|-----|---------|-------|-------|
| Frequency Range              | 2   |         | 18    | GHz   |
| Small Signal Gain            | 18  |         |       | dB    |
| Small Signal Gain Flatness   |     |         | ±2    | dB    |
| Noise Figure                 |     |         | 7     | dB    |
| Output Power 1dB compression | 22  |         |       | dBm   |
| IP3                          |     |         |       | dBm   |
| VSWR                         |     |         | 2.2:1 | Ratio |
| DC Power Supply              |     | 12      |       | Volt  |
| Current                      |     | 380     |       | mA    |

Note:Gain variation over temperature:±2.5dB.

### ENVIRONMENTAL RATINGS:

| Parameter                          | Min   | Typical | Max   | Units |
|------------------------------------|-------|---------|-------|-------|
| Max Input power                    |       |         | +20   | dBm   |
| Operating Temperature              | 0     |         | +60   | °C    |
| Non-operating Temperature          | -55   |         | +125  | °C    |
| Relative humidity (non-condensing) |       | 95      |       | %     |
| Altitude (MIL-STD-810F)            | 10000 |         | 30000 | feet  |
| Shock / Vibration (MIL-STD-810F)   |       | Airbone |       |       |

### MECHANICAL SPECIFICATIONS:


| Parameter            | Value        | Limits | Units      |
|----------------------|--------------|--------|------------|
| Dimensions           | 44.7*29.5*17 |        | Millimeter |
| Weight               | 50           |        | gram       |
| RF Connectors Input  | SMA-F        |        |            |
| RF Connectors output | SMA-F        |        |            |
| Impedance            | 50           |        | ohms       |

Note:miniature size,drop-in ,SMT and customized specification is also available



# WIDE BAND MEDIUM POWER AMPLIFIER MBM0218G1822

## OUTLINE DRAWING(mm):

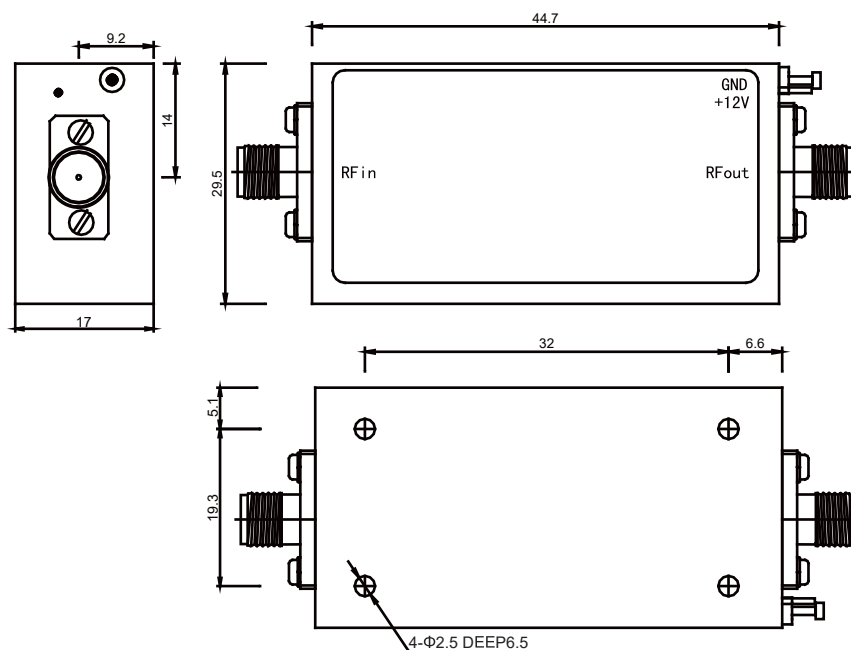

DH4