

FEATURES

- LOW Cost,High Quality
- Compact Size,Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

APPLICATIONS

- Load isolation
- Module integration



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	1.35		1.85	GHz
Band Width		full		MHz
Insertion Loss			0.7	dB
Isolation	18			dB
VSWR			1.35	Ratio
Power Handling(FWD)			1	Watt
Power Handling(REV)			1	Watt

ENVIRONMENTAL RATINGS:


Parameter	Min	Typical	Max	Units
Operating Temperature	-20		+70	°C
Non-operating Temperature	-40		85	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	Feet
Shock / Vibration (MIL-STD-810F)		Airbone		
ROHS		Compliant		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions(L*W*H)	25.4*28.5*20	Max	Milimeter
Weight	100	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		Ohms

Other frequency bands&specifications are also available

OUTLINE DRWAING(mm):

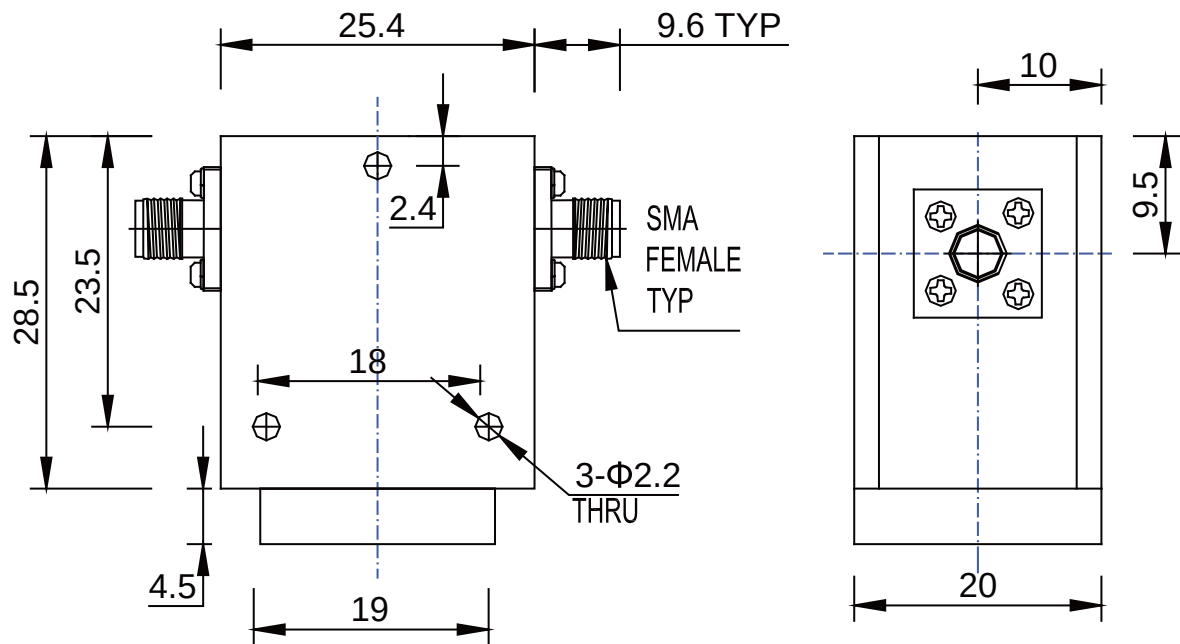

CI04

HOW TO ORDER

CIS0135500A-xx-xx

Low End Frequency(MHz)

High End Frequency(MHz)

Example: To order a 1350-1850MHz Isolator and specify CIS0135500A-1350-1850