

### FEATURES

- LOW Cost,High Quality
- Compact Size,Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

### APPLICATIONS

- Load isolation
- Module integration



### ELECTRICAL SPECIFICATIONS@25°C:

| Parameter               | Min   | Typical | Max   | Units |
|-------------------------|-------|---------|-------|-------|
| Frequency Range         | 1.539 |         | 1.609 | GHz   |
| Band Width              |       | 70      |       | MHz   |
| Insertion Loss          |       |         | 0.3   | dB    |
| Isolation               |       |         | 25    | dB    |
| VSWR                    |       |         | 1.2   | Ratio |
| Power Handling(average) |       |         | 30    | Watt  |

### ENVIRONMENTAL RATINGS:


| Parameter                          | Min   | Typical   | Max   | Units |
|------------------------------------|-------|-----------|-------|-------|
| Operating Temperature              | -40   |           | +70   | ℃     |
| Non-operating Temperature          | -40   |           | 85    | ℃     |
| Relative humidity (non-condensing) |       | 95        |       | %     |
| Altitude (MIL-STD-810F)            | 10000 |           | 30000 | Feet  |
| Shock / Vibration (MIL-STD-810F)   |       | Airbone   |       |       |
| ROHS                               |       | Compliant |       |       |

### MECHANICAL SPECIFICATIONS:

| Parameter            | Value        | Limits | Units     |
|----------------------|--------------|--------|-----------|
| Dimensions(L*W*H)    | 25.4*28.5*20 | Max    | Milimeter |
| Weight               | 100          | Max    | gram      |
| RF Connectors Input  | N-F          |        |           |
| RF Connectors output | N-F          |        |           |
| Impedance            | 50           |        | Ohms      |

**Other frequency bands&specifications are also available**

### OUTLINE DRWAING(mm):

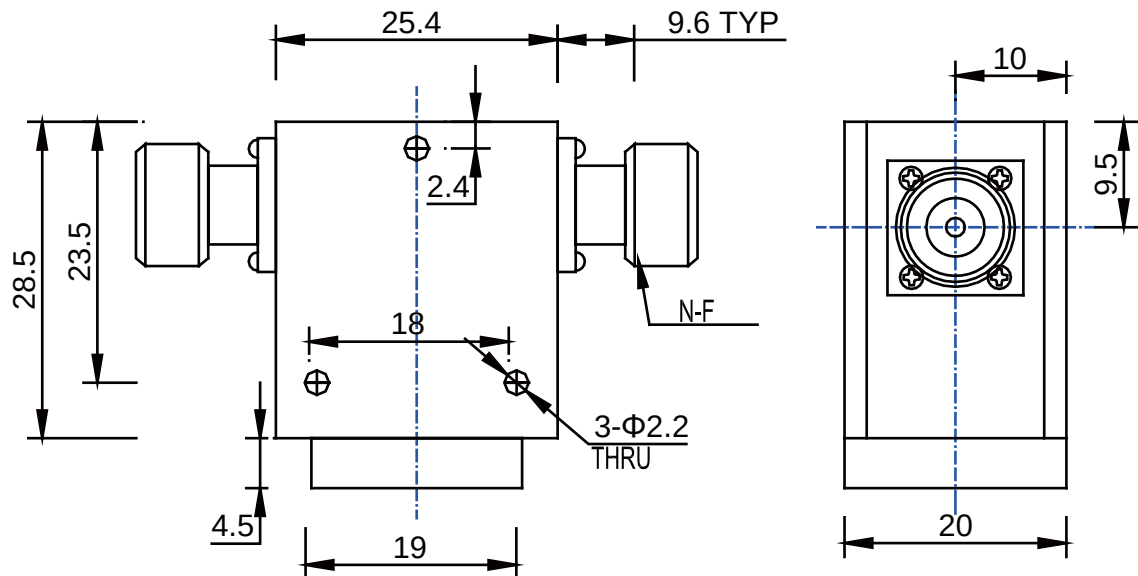

CI17(N)

### HOW TO ORDER

CIS085020AN-xx-xx

Low End Frequency(MHz)

High End Frequency(MHz)

Example: To order a 1539-1549MHz Isolator and specify CIS085020AN-1539-1549