



WIDE BAND MEDIUM POWER AMPLIFIER

MBM0618G2530

FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction

APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	6		18	GHz
Small Signal Gain	25			dB
Small Signal Gain Flatness			±2	dB
Noise Figure			5.5	dB
Output Power 1dB compression	30			dBm
IP3				dBm
VSWR			2:1	Ratio
DC Power Supply		12		Volt
Current		1300		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input power			+20	dBm
Operating Temperature	-55		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:


Parameter	Value	Limits	Units
Dimensions	46.4*45*16		Millimeter
Weight	50		gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms

Note:miniature size,drop-in ,SMT and customized specification is also available



WIDE BAND MEDIUM POWER AMPLIFIER MBM0618G2530

OUTLINE DRAWING(mm):

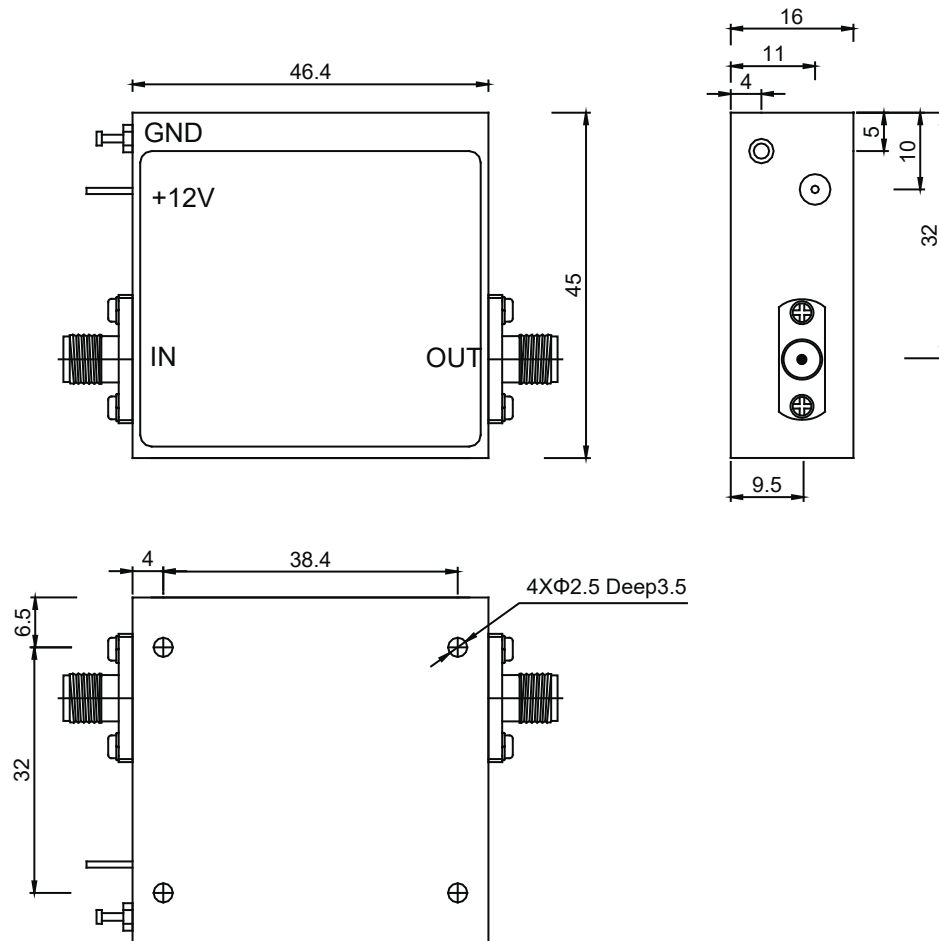

BH8

TEST DATA:

Frequency range(GHz)	Gain dB min	Gain Flatness dB	P-1 (dBm)	Input VSWR	Current (A)
6-18	25.3	±1.9	31	1.66	1.25