



WIDE BAND MEDIUM POWER AMPLIFIER

MBM0812G3230

FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction

APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	8		12	GHz
Small Signal Gain	32		35	dB
Small Signal Gain Flatness			±1.5	dB
Noise Figure		5.5		dB
Output Power 1dB compression	30			dBm
IP3				dBm
VSWR Input/output			2:1	Ratio
DC Power Supply		12		Volt
Current		1.2		A

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input power			+20	dBm
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:


Parameter	Value	Limits	Units
Dimensions	46.4*45*16		Milimeter
Weight	200		gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		Ohms

Note:miniature size,drop-in ,SMT and customized specification is also available

MEURO WIDE BAND MEDIUM POWER AMPLIFIER

MBM0812G3230

OUTLINE DRAWING(mm):

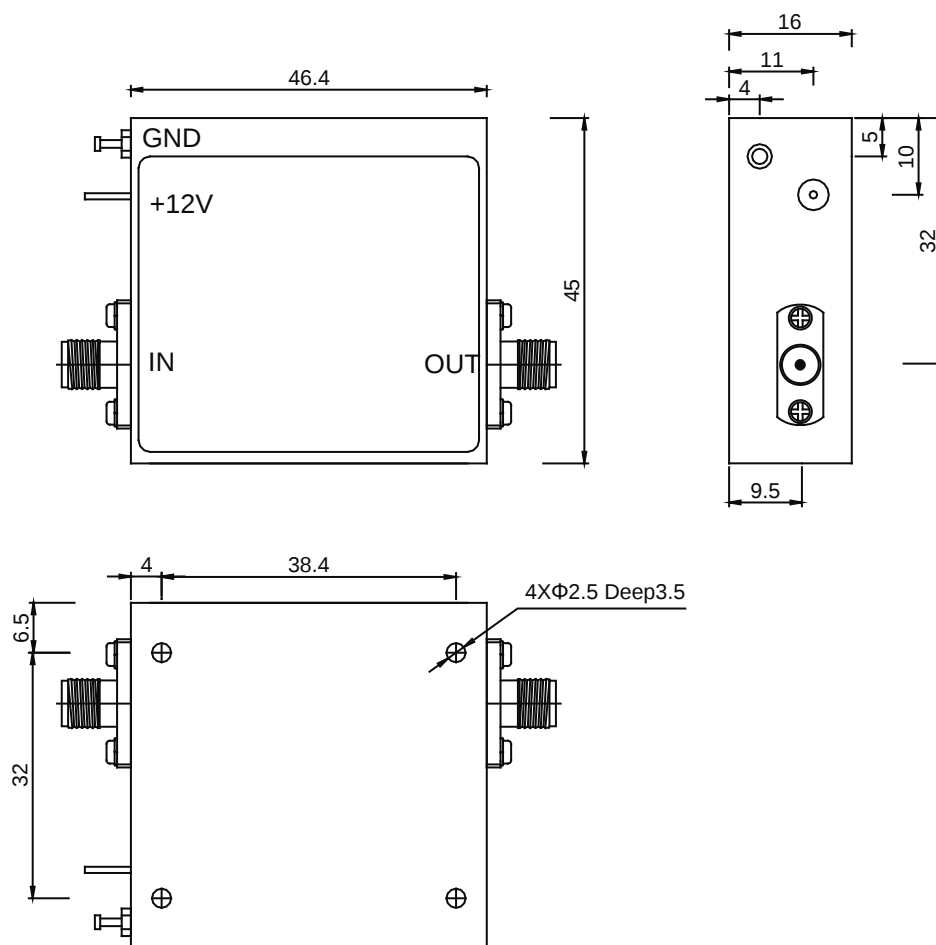

BH8

TEST DATA:

Frequency range(GHz)	Gain dB min	Gain Flatness dB max	Noise Figure(dB.max)	P-1 (dBm.min)	Input VSWR (max)	Output VSWR (max)	Current (A)
8-12	32	±16	6.3	30.2	1.75	1.1	1.22