

FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment




ELECTRICAL SPECIFICATIONS@25°C:

Frequency Range(GHz)	Max VSWR
DC-1	1.10
DC-2	1.15
DC-3	1.20

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	Φ20*53		millimeter
Weight	50	type	gram
Operating Temperature	-55~+125		°C
Impedance	75		ohms

OUTLINE DRAWING(mm):

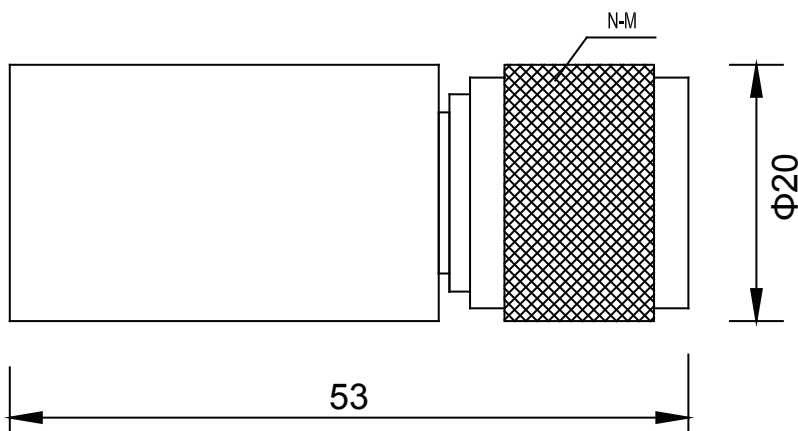

Note:

- 1.Average power:2W@ 25°C , 0.2W @ 125°C.
- 2.Peak power: 0.5KW (5μs pulse width with 0.4% duty cycle).
- 6.Connector type: N,BNC,F, please remark connector type when order standard part is N-M.
- 7.Customized specification is also available.