

FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment


ELECTRICAL SPECIFICATIONS@25°C:

Part Number	Frequency Range(GHz)	Max VSWR
MCT040H10KL	0.1-4000MHz	1.10-1.50

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	Determined based on powe		millimeter
Weight	110	type	Kg
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

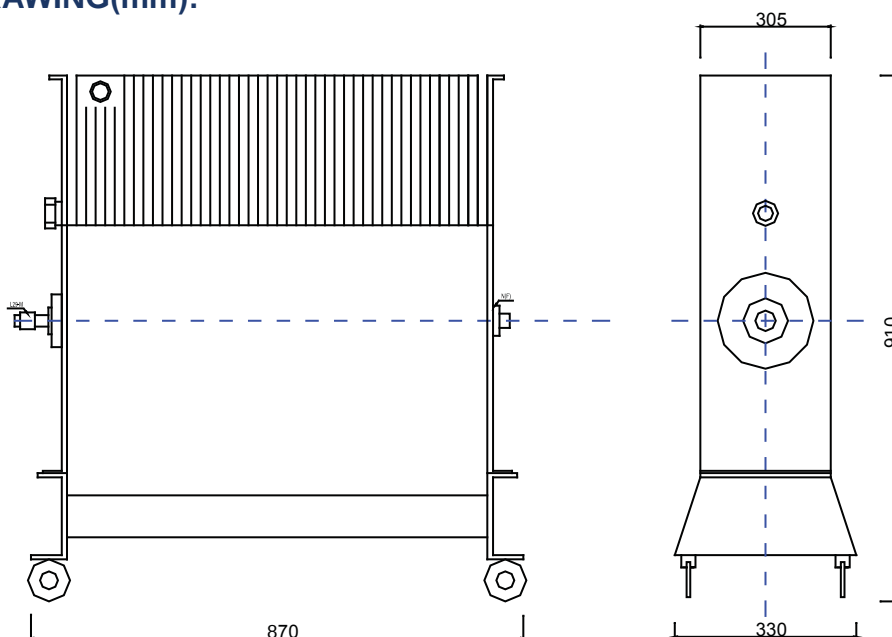

Note:

- 1.Average power:100W-10KW
- 2.Peak power:10KW-200KW (5μs)
- 3.Power accuracy: ±10%
- 4.Connector type: N(F),L27(F),L29(F),L36(F),L52(F), please remark connector type when order standard part is N-F input,L29-M output.
- 5.Customized specification is also available.