

### FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

### APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment




### ELECTRICAL SPECIFICATIONS@25°C:

Frequency Range(GHz)	Max VSWR
DC-3	1.10
DC-6	1.25
DC-10	1.35

### MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	Φ63*94		millimeter
Weight	300	type	gram
Operating Temperature	-55~+125		°C
Impedance	50		ohms

### OUTLINE DRAWING(mm):

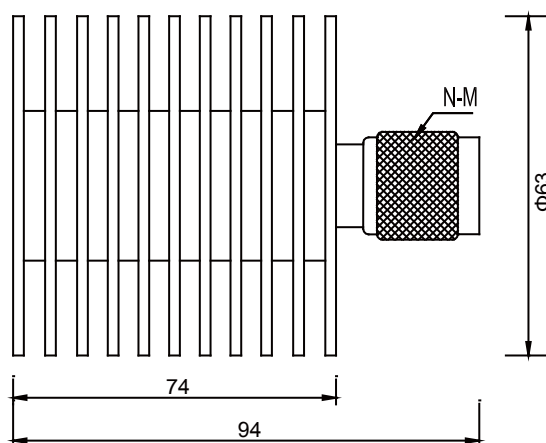

### Note:

- 1.Average power:60W @ 25°C , 6W @ 125°C.
- 2.Peak power:5KW (5μs pulse width with 6% duty cycle)
- 3.Connector type: N(M),N(F), please remark connector type when order standard part is N-M .
- 4.Customized specification is also available.