

### FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

### APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment




### ELECTRICAL SPECIFICATIONS@25°C:

Frequency Range(GHz)	Max VSWR	
	Normal	Precise
DC-3	1.15	1.10
DC-6	1.20	1.10
DC-8	1.25	1.15
DC-10	1.35	1.30

### MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	215*130*75		millimeter
Weight	1.8	type	Kg
Operating Temperature	-55~+125		°C
Impedance	50		ohms

### OUTLINE DRAWING(mm):

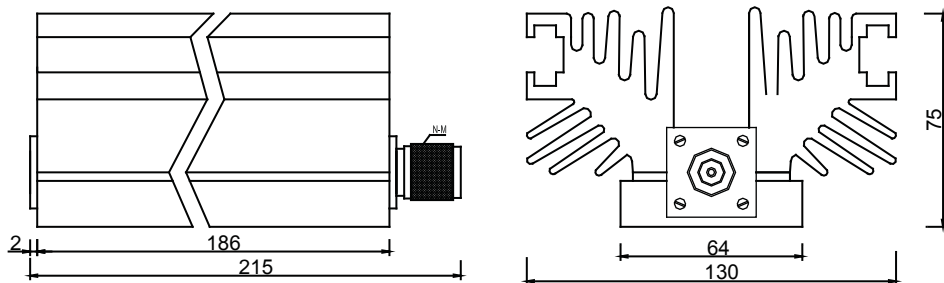

### Note:

- 1.Average power:200W@25°C , 20W@ 125°C.
- 2.Peak power:5KW (5μs pulse width with 1.5% duty cycle)
- 3.Connector type: N,7/16, please remark connector type when order standard part is N-M .
- 4.Customized specification is also available.