

FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment




ELECTRICAL SPECIFICATIONS@25°C:

Frequency Range(GHz)	Max VSWR
DC-3	1.10
DC-6	1.15
DC-12.4	1.20
DC-18	1.25
DC-26.5	1.30

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	$\Phi 15.7 \times L$ ((M) L=25.5;(F) L=24.6		millimeter
Weight	10	type	gram
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

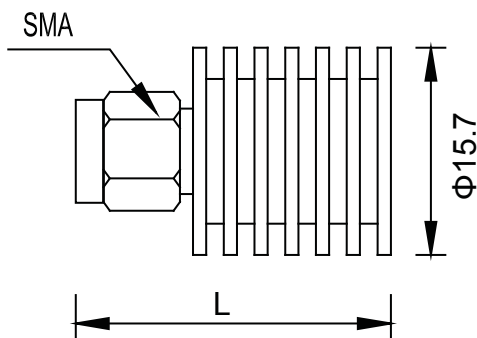

Note:

- 1.Average power:5W @ 25°C , 0.5W @ 125°C.
- 2.Peak power:0.5KW (5μs pulse width with 0.5% duty cycle)
- 3.Connector type:SMA male or female,please remark connector type when order.
- 4.Customized specification is also available.