

FEATURES

- DC-40GHz, up to 50kW
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment




ELECTRICAL SPECIFICATIONS@25°C:

Frequency Range(GHz)	Max VSWR
DC-32	1.35
DC-36	1.35
DC-40	1.35

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	M:Φ8×24.2/F:Φ8×22.2mm		millimeter
Weight	5	type	gram
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

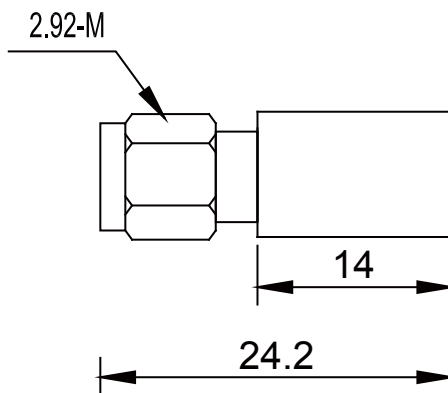

Note:

- 1.Average power: 2W @ 25°C , 0.2W @ 125°C.
- 2.Peak power:0.2W (5μs pulse width with 0.5% duty cycle)
- 3.Connector type:2.92mm male or female,please remark connector type when order.
- 4.Customized specification is also available.