



DC-4GHz 300W COAXIAL FIXED ATTENUATOR MFT040F300F50L

FEATURES

- DC-40GHz, up to 10kW
- Flatness Attenuation Value and Accuracy
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:


Frequency Range(GHz)	Attenuation Value & Accuracy (dB)				Max VSWR
	10	20	30	40-50	
DC-1	±1.0	±1.0	±0.75	±0.75	1.20
DC-2	±1.5	±1.5	±1.0	±1.0	1.25
DC-3	±1.75	±1.75	±1.25	±1.25	1.35
DC-4	±2.0	±2.0	±1.5	±1.5	1.50

How to order:MFT040F300F50L-XX,if order 30dB attenuator part number will be MFT040F300F50L-30.XX:Atten Value.

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	327*98*60		Millimeter
Weight	3	type	Kg
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

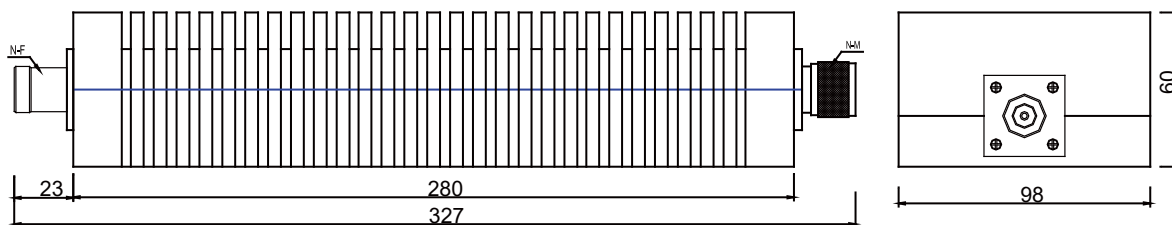

Note:

- 1.Average power:300W@ 25°C , 30W @ 125°C.
- 2.Peak power:10KW (5μs pulse width with 2.5% duty cycle)
- 3.Connector type: N, 7/16, please remark connector type. Standard is N-M input ,N-F output.
- 4.Customized special attenuation value & accuracy is also available.