

FEATURES

- DC-40GHz, up to 10kW
- Flatness Attenuation Value and Accuracy
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:


Frequency Range(GHz)	Attenuation Value & Accuracy (dB)		Max VSWR
	30	40-50	
DC-4	±0.5	±0.5	1.25
DC-6	±0.75	±0.75	1.30
DC-8	±1.0	±1.0	1.40
DC-10	±1.0	±1.0	1.45

How to order:MFT100F300F50L-XX,if order 30dB attenuator part number will be MFT100F300F50L-30.XX:Atten Value.

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	295*130*75		Millimeter
Weight	3.5	type	Kg
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

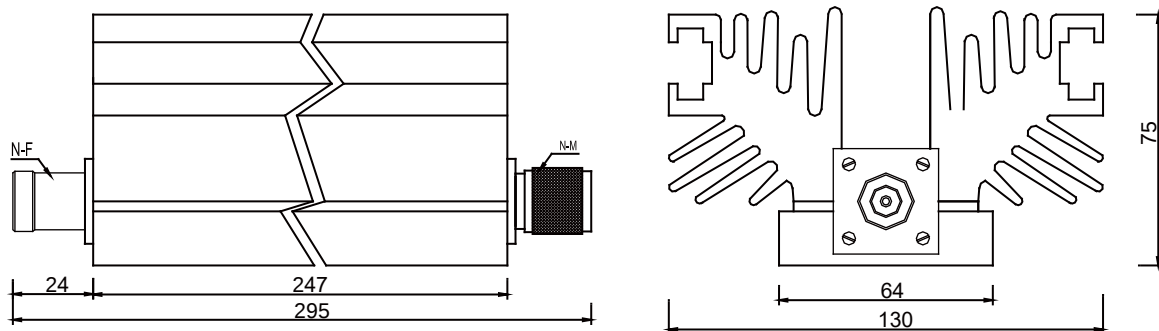

Note:

- 1.Average power:300W @ 25°C , 30W @ 125°C.
- 2.Peak power:5KW (5μs pulse width with 6% duty cycle)
- 3.Connector type: N,7/16, please remark connector type.Standard is N-M input ,N-F output.
- 4.Customized special attenuation value & accuracy is also available.