



# WIDE BAND LOW NOISE AMPLIFIER

## MLB0618G1430

### FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction

### APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



### ELECTRICAL SPECIFICATIONS@25°C:

| Parameter                    | Min | Typical | Max | Units |
|------------------------------|-----|---------|-----|-------|
| Frequency Range              | 6   |         | 18  | GHz   |
| Small Signal Gain            | 14  |         |     | dB    |
| Small Signal Gain Flatness   |     |         | ±1  | dB    |
| Noise Figure                 |     |         | 3   | dB    |
| Output Power 1dB compression |     |         |     | dBm   |
| IP3                          |     |         | 24  | dBm   |
| VSWR Input/output            |     |         | 2:1 | Ratio |
| DC Power Supply              |     | 12      |     | Volt  |
| Current                      |     | 120     |     | mA    |

### ENVIRONMENTAL RATINGS:


| Parameter                          | Min   | Typical | Max   | Units |
|------------------------------------|-------|---------|-------|-------|
| Max Input power                    |       |         | +20   | dBm   |
| Operating Temperature              | -40   |         | +85   | °C    |
| Non-operating Temperature          | -55   |         | +125  | °C    |
| Relative humidity (non-condensing) |       | 95      |       | %     |
| Altitude (MIL-STD-810F)            | 10000 |         | 30000 | feet  |
| Shock / Vibration (MIL-STD-810F)   |       | Airbone |       |       |

### MECHANICAL SPECIFICATIONS:

| Parameter            | Value         | Limits | Units      |
|----------------------|---------------|--------|------------|
| Dimensions           | 34.4*16.8*8.1 | Max    | Millimeter |
| Weight               | 50            | Max    | gram       |
| RF Connectors Input  | SMA-F         |        |            |
| RF Connectors output | SMA-F         |        |            |
| Impedance            | 50            |        | ohms       |

Note:miniature size,drop-in ,SMT and customized specification is also available

### OUTLINE DRAWING(mm):

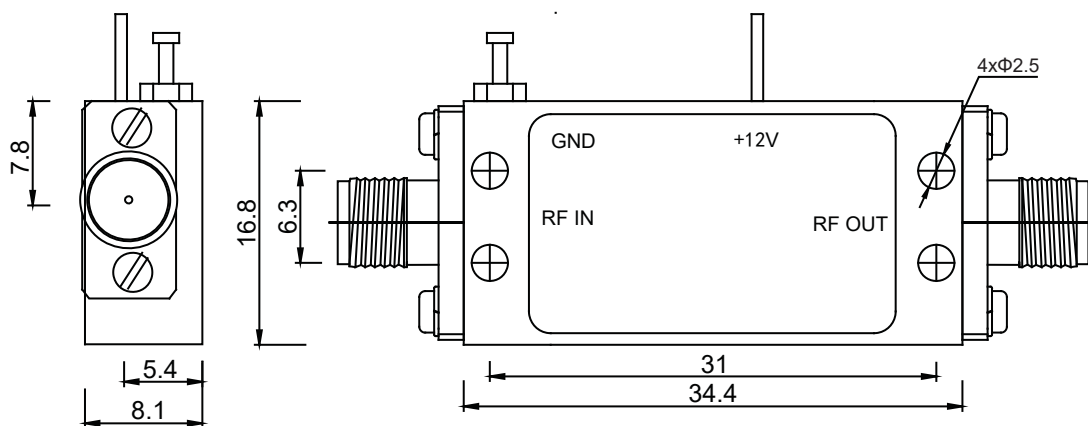

BH2

### TEST DATA:

| characteristic                    | test data |
|-----------------------------------|-----------|
| Frequency range                   | 6-18GHz   |
| Small Signal Gain(min)            | 14.2dB    |
| Small Signal Gain Flatness(max)   | ±2.2dB    |
| Noise Figure(max)                 | 2.2dB     |
| Output Power 1dB compression(min) | 16dBm     |
| VSWR Input/output(max)            | 1.95/1.9  |
| DC Power Supply                   | 12V       |
| Current                           | 80mA      |