



WAVEGUIDE HIGH POWER LIMITER MLT054059H150K

FEATURES

- High Power Handling
- Low Limiting Threshold
- Low Leakage Level
- Miniature Sizes

APPLICATIONS

- Front End Protection for LNA's
- Power Leveling (Limiting)
- Receiver Protection
- Radar&EW system



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	5.4		5.9	GHz
Peak Power handling			15	KW
Overload Power Handling	150		300	KW
Pulse Width			2	Us
Duty Cycle			0.1	%
Insertion Loss			1	dB
Flatness Leakage			75	mW
Spike Leakage			5	W
VSWR			1.4:1	Ratio
Recovery Time			10	Us

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating temperature	-40		+75	°C
Non-operating Temperature	-55		125	°C
Relative humidity(non-condensing)	-95		98	%
Altitude (MIL-STD_810F)	10000		30000	feet
Shock/Vibration(MIL-Std_810F)		Airbone		
Pressurization	30			Psig


MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	89.45*90*85	Max	Millimeter
Weight	200	Max	gram
RF Connectors Input	FDP-48		
RF Connectors output	FDP-48		



WAVEGUIDE HIGH POWER LIMITER MLT054059H150K

OUTLINE DRAWING(mm):

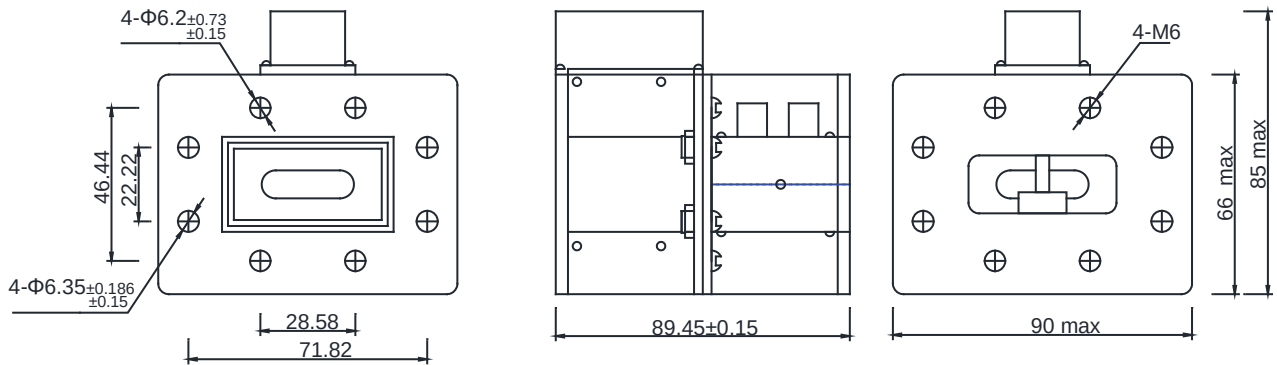

WL10