



NARROW BAND LOW NOISE AMPLIFIER

MNL015017G3007

FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction

APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	1.5		1.7	GHz
Small Signal Gain	30			dB
Small Signal Gain Flatness			±0.5	dB
Noise Figure			0.7	dB
Output Power 1dB compression	12			dBm
IP3				dBm
VSWR Input/output			2:1	Ratio
DC Power Supply		12		Volt
Current		150		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input power			20	dBm
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		


MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	40.7*16.8*8.1	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms

Note:miniature size,drop-in ,SMT and customized specification is also available

Meuro Microwave Corp. A#15F No.58 Shuxi Rd Jingcheng International Plaza,Chengdu, 610036 Tel: (028)8500 4482 Fax: (028)8500 4481
sales@meurorf.com www.meurorf.com

OUTLINE DRAWING(mm):

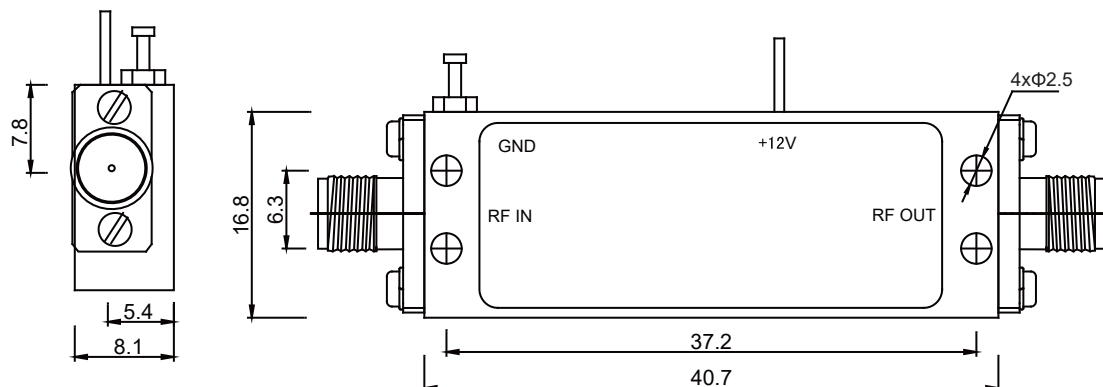

BH3

TEST DATA:

Frequency range (GHz)	Gain(dB) Min	Gain Flatness (± dB)	Noise Figure (dB) Max	Output Power (dBm) Typ	Input VSWR Max	Output VSWR Max	Current @+12V (mA)
1.5-1.7	30.88	0.2	0.8	16.5	1.46	1.58	64

