



NARROW BAND MEDIUM POWER AMPLIFIER

MNM139141G1623

FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes for drop-In Assembly
- Hermetically Sealed Package for Military Application

APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	13.9		14.1	GHz
Band Width		100		MHz
Small Signal Gain	16			dB
Small Signal Gain Flatness			±0.25	dB
Noise Figure			6	dB
Output Power 1dB compression	23			dBm
VSWR			1.5:1	Ratio
DC Power Supply		12		Volt
Current		300		mA

Note: Gain variation over temperature: ±1dB.

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input power			+20	dBm
Operating Temperature	0		+60	°C
Non-operating Temperature	-55		+125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	44.7*29.5*17	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms


Note: miniature size, drop-in, SMT and customized specification is also available



NARROW BAND MEDIUM POWER AMPLIFIER

MNM139141G1623

OUTLINE DRAWING(mm):

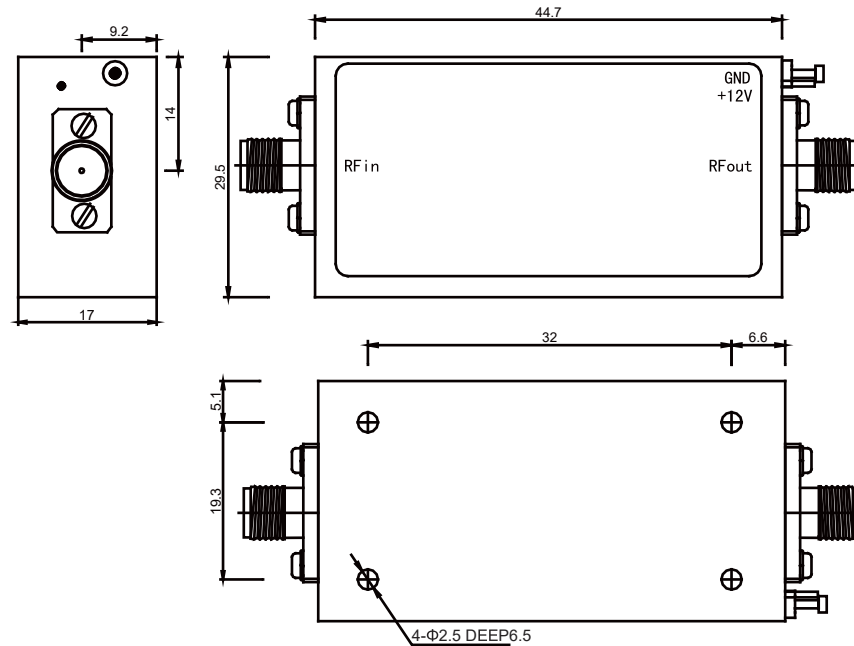

DH4