



12-WAY WIDE BAND POWER DIVIDER

MPD001002S12M

FEATURE

- Operating Frequency:0.5~18GHz
- Stable Performance and High Reliability
- High Isolation
- Low Insertion Loss
- Small Phase&Amplitude Errors
- Operating Temperature:-55~+85°C

APPLICATIONS

- Communication system
- Radar&Warfare system
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	0.001		0.2	GHz
Isolation	23			dB
Insertion Loss			0.7	dB
VSWR Input			1.8	Ratio
VSWR Output			1.5	Ratio
Phase Balance			10	degree
Amplitude Balance			0.5	dB
Power Average			25	watt

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		


MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	159*88*10	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms



12-WAY WIDE BAND POWER DIVIDER MPD001002S12M

OUTLINE DRAWING(mm):

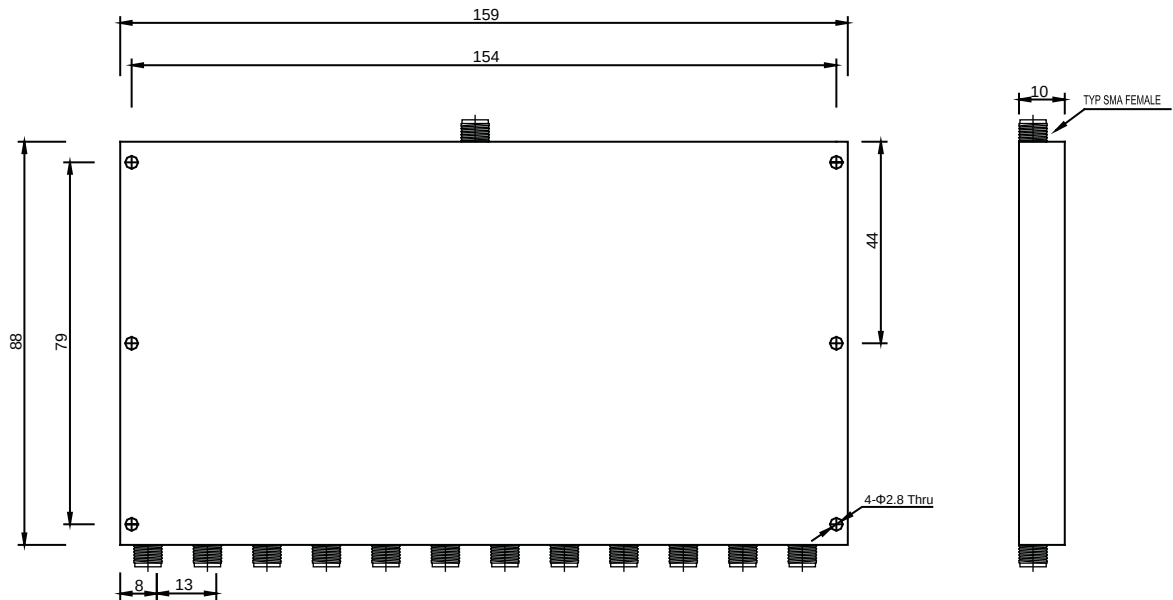

12D1