



4-WAY WIDE BAND POWER DIVIDER MPD008025S4H

FEATURE

- Operating Frequency:0.5~18GHz
- Stable Performance and High Reliability
- High Isolation
- Low Insertion Loss
- Small Phase&Amplitude Errors
- Operating Temperature:-55~+85°C

APPLICATIONS

- Communication system
- Radar&Warfare system
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	0.8		2.5	GHz
Isolation	20			dB
Insertion Loss			0.6	dB
VSWR			1.25	Ratio
Phase Balance			±2	degree
Amplitude Balance			±0.2	dB
Power Handling(Forward)			30	Watt
Power Handling(Reversed)			1	Watt

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		


MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	56*50*10	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms



4-WAY WIDE BAND POWER DIVIDER MPD008025S4H

OUTLINE DRAWING(mm):

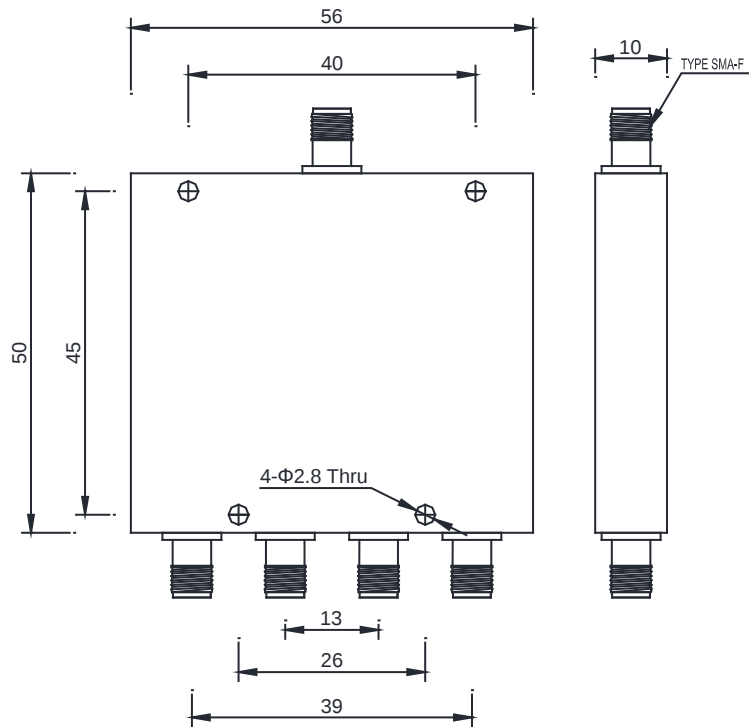

4D25

TEST DATA:

Frequency Range	Insertion Loss	Isolation	VSWR	Amplitude Balance	Phase Balance
800~2500MHz	0.54dB	22.6dB	1.14:1	0.11dB	0.8°