




6-WAY WIDE BAND POWER DIVIDER

MPD060180S6M

FEATURE

- Operating Frequency: 0.5~18GHz
- Stable Performance and High Reliability
- High Isolation
- Low Insertion Loss
- Small Phase & Amplitude Errors
- Operating Temperature: -55~+85°C



APPLICATIONS

- Communication system
- Radar & Warfare system
- Test Equipment

ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	6		18	GHz
Isolation	16			dB
Insertion Loss			1.9	dB
VSWR			1.8:1	Ratio
Phase Balance			±10	degree
Amplitude Balance			±1	dB
Power Handling(Forward)			30	Watt
Power Handling(Reversed)			1	Watt

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-55		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		


MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	76.5*48*10	Max	Millimeter
Weight	100	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms



6-WAY WIDE BAND POWER DIVIDER MPD060180S6M

OUTLINE DRAWING(mm):

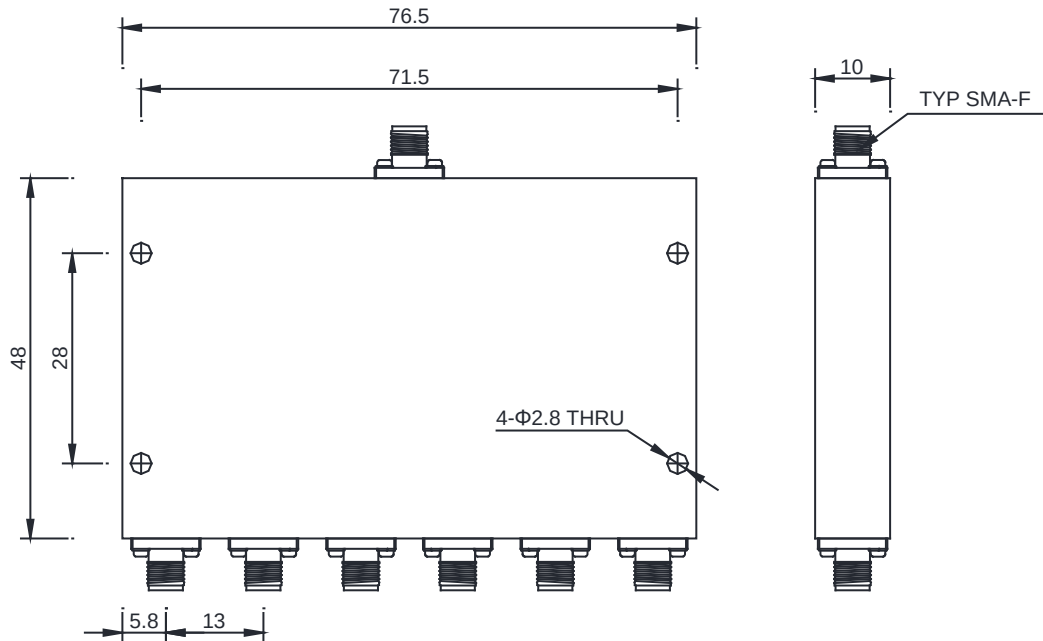

6D8