



WIDE BAND LIMITING AMPLIFIER MTB0218R6110L

FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes for drop-In Assembly
- Rugged/compact Thin Film Construction

APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	2		18	GHz
Input power Range	-61		+10	dBm
Noise Figure			7.5	dB
Saturated Power output	7		11	dBm
output Power Flatness			±1.5	dB
harmonic output		-10		dBc
VSWR Input/output			2:1	Ratio
Pulse response Overshoot			0.5	dB
Pulse response Recovery time		50		ns
Pulse response Settling time		50		ns
Pulse response Rise time		20		ns
DC Power Supply		12		Volt
Current		950		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input power				dBm
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		




WIDE BAND LIMITING AMPLIFIER MTB0218R6110L

MECHANICAL SPECIFICATIONS:

Parameter	Valus	Limits	Units
Dimensions	100*25*18	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms

OUTLINE DRAWING(mm):

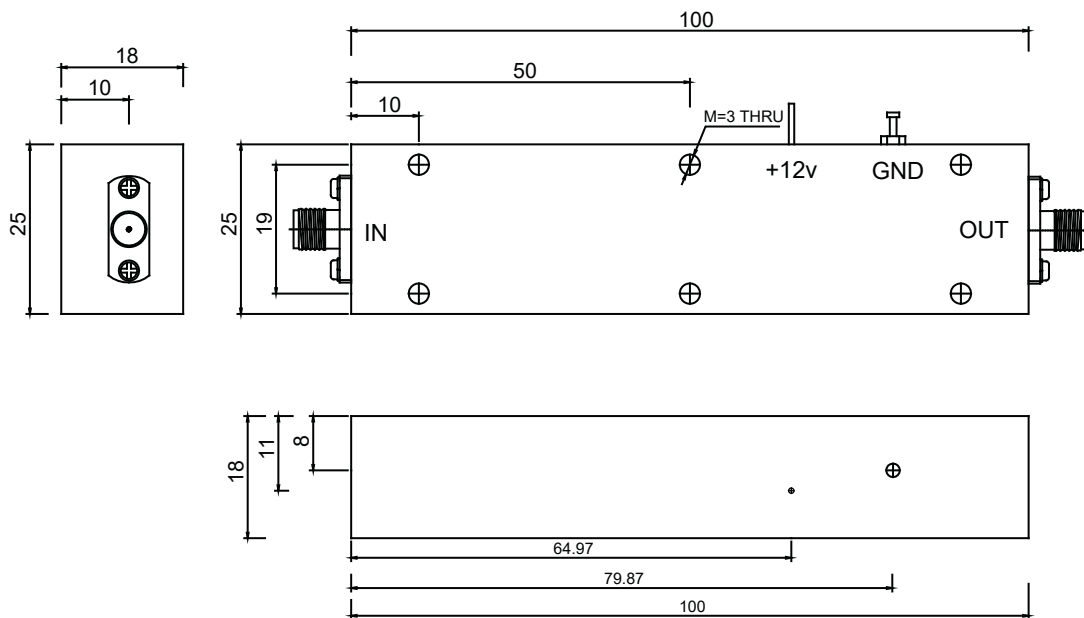

DH9



WIDE BAND LIMITING AMPLIFIER

MTB0218R6110L

TEST DATA:

Characteristic	Specification	Test Data
Part Number	MTB0218R6110L	MTB0218R6110L
Frequency Range	2-18GHz	2-18GHz
Input Power Range	-61~+10dBm	-61~+10dBm
Noise Figure	7.5dB	4.5dB
Saturated Power Output	11dBm	14dBm
Output Power Flatness	±1.5	±2.2
Harmonic Output	-10	-10
VSWR Input/Output	2:1	2:1
Pulse Response Overshoot	0.5dB	0.5dB
Pulse Response Recovery Time	50ns	50ns
Pulse Response Setting Time	50ns	50ns
Pulse Response Rise Time	20ns	20ns
DC Power Supply	12V	12V
Current	950mA	610mA