


FEATURE:

- Solid State, Mixture Integrated
- High Speed, Low Loss, High Isolation
- Field Removable SMA(F) Connector
- Integrated with Driver

APPLICATION:

- Test equipment
- Radar & Warfare system
- Communication system

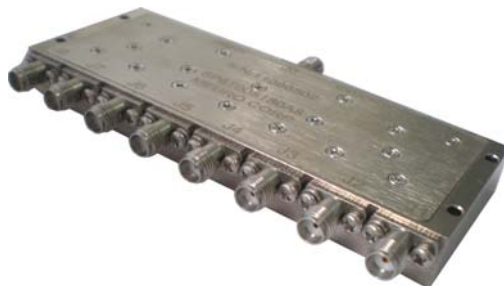

ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	4		8	GHz
Insertion Loss		3.5		dB
Isolation	60			dB
VSWR			1.5	Ratio
Power handling			0.5	watt
Switching Time			50	ns
DC Power supply +5V		360		mA
DC Power supply -5V		240		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	131*45.5*15	Max	Millimeter
Weight	200	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms

TTL 0 (low) (0 to 0.8 V) : Loss
TTL 1 (high) (2.4 to 4.7 V) : Isolation

Meuro Microwave Corp. A#15F No.58 Shuxi Rd Jingcheng International Plaza, Chengdu, 610036 Tel: (028)8500 4482 Fax: (028)8500 4481
sales@meurorf.com www.meurorf.com