

FEATURE:

- Solid State, Mixture Integrated
- High Speed, Low Loss, High Isolation
- Field Removable SMA(F) Connector
- Integrated with Driver

APPLICATION:

- Test equipment
- Radar & Warfare system
- Communication system



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	2		18	GHz
Insertion Loss		4.4		dB
Isolation	80			dB
VSWR			2.0	Ratio
Power handling			0.5	watt
Switching Time			50	ns
DC Power supply +5V		240		mA
DC Power supply -5V		160		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:



Parameter	Value	Limits	Units
Dimensions	105*38*12	Max	Millimeter
Weight	200	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms

TTL CONTROL LOGIC

TTL 0 (low) (0 to 0.8 V) :Loss

TTL 1 (high) (2.4 to 4.7 V) :Isolation

OUTLINE DRAWING(mm):

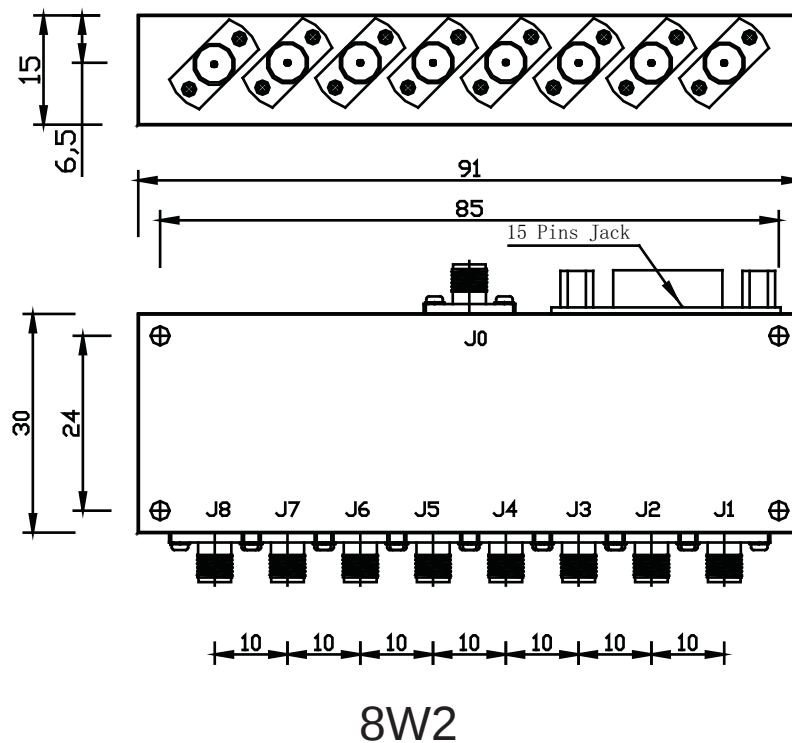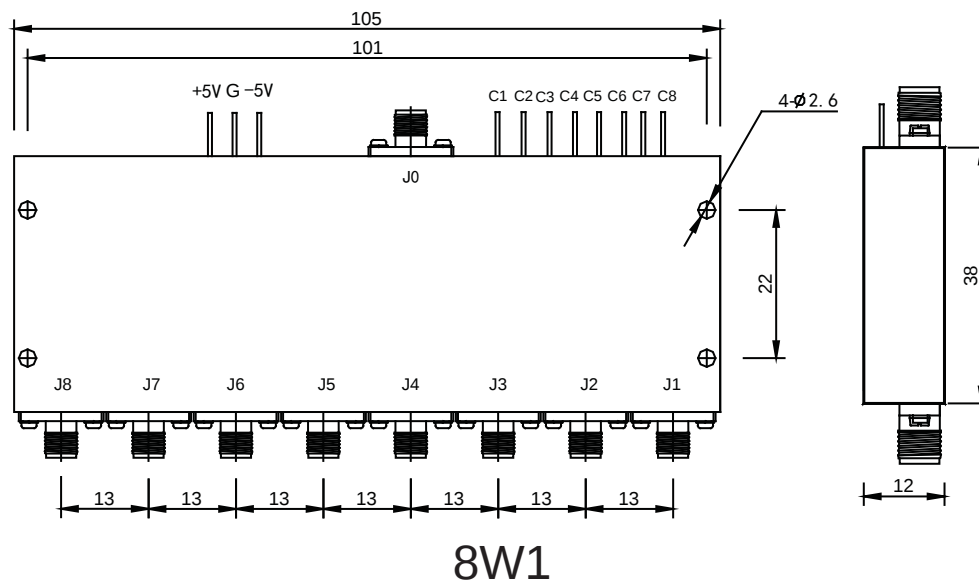

TTL CONTROL LOGIC

TTL 0 (low) (0 to 0.8 V) :Loss

TTL 1 (high) (2.4 to 4.7 V) :Isolation

OUTLINE DRAWING(mm):

