



SPST REFLECTIVE HIGH POWER PIN SWITCH

SPST005020R6H010

FEATURE:

- Solid State,Mixture Integrated
- High Speed,Low Loss,High Isolation
- Field Removable SMA(F) Connector
- Integrated with Driver

APPLICATION:

- Test equipment
- Radar&Warfare system
- Communication system



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	0.5		2	GHz
Insertion Loss			1.5	dB
Isolation	60			dB
VSWR			1.5:1	Ratio
Input Power CW	10			watt
Switching Times		300	500	ns
DC Power supply +5V		50		mA
DC Power supply -12V		20		mA

ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-55		125	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	50*40*16	Max	Millimeter
Weight	50	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		ohms




SPST REFLECTIVE HIGH POWER PIN SWITCH SPST005020R6H010

TTL CONTROL LOGIC

TTL 0 (low) (0 to 0.8 V) :J0-J1

TTL 1 (high) (2.4 to 4.7 V) :J0-J2

OUTLINE DRAWING(mm):

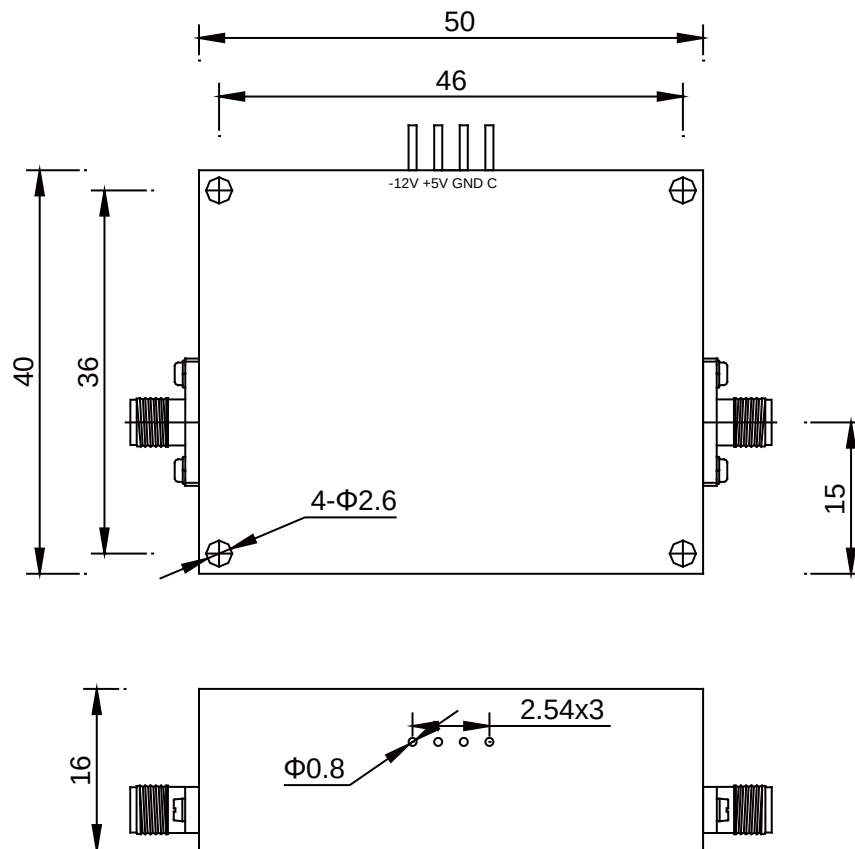

SW10