

FEATURES

- LOW Cost,High Quality
- Compact Size,Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

APPLICATIONS

- Load isolation
- Module integration



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	18.5		26.5	GHz
Band Width		1000		MHz
Insertion Loss			0.3	dB
Isolation	23		23	dB
VSWR			1.2	Ratio
Power Handling(average)			30	Watt

ENVIRONMENTAL RATINGS:


Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+80	℃
Non-operating Temperature	-40		85	℃
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	Feet
Shock / Vibration (MIL-STD-810F)		Airbone		
ROHS		Compliant		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions(L*W*H)	24*27*22.4	Max	Milimeter
Weight	100	Max	gram
RF Connectors Input	SMA-F		
RF Connectors output	SMA-F		
Impedance	50		Ohms


Other frequency bands&specifications are also available

OUTLINE DRAWING(mm):

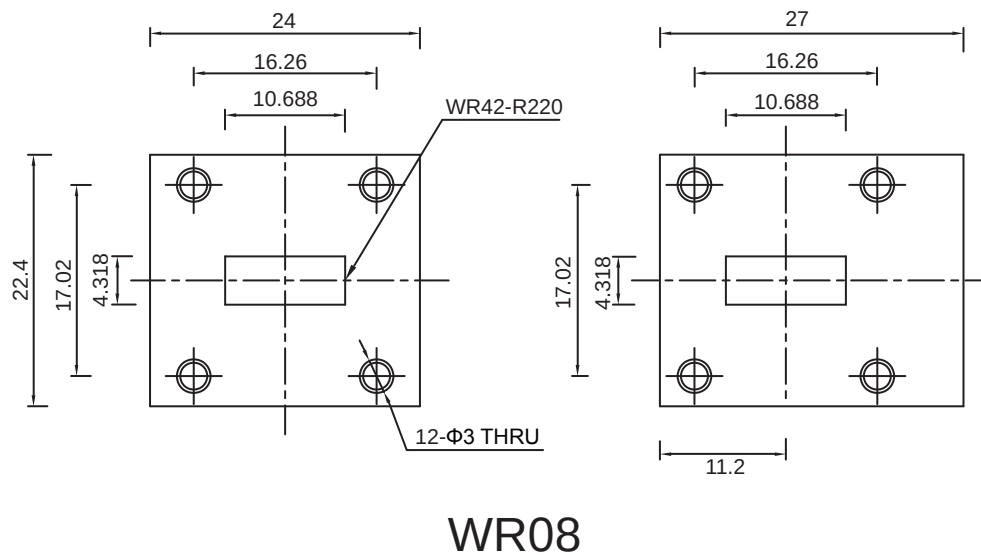

WR08

HOW TO ORDER

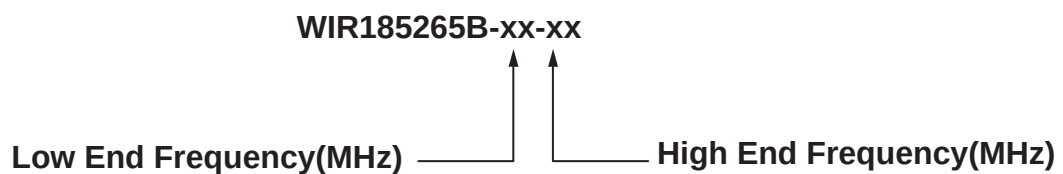

Example: To order a 21300-22300MHz Circulator and specify WIR185265B-21300-22300