

### FEATURES

- LOW Cost,High Quality
- Compact Size,Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

### APPLICATIONS

- Load isolation
- Module integration



### ELECTRICAL SPECIFICATIONS@25°C:

| Parameter               | Min | Typical | Max | Units |
|-------------------------|-----|---------|-----|-------|
| Frequency Range         | 7.7 |         | 8.4 | GHz   |
| Band Width              |     | 700     |     | MHz   |
| Insertion Loss          |     |         | 0.3 | dB    |
| Isolation               | 23  |         |     | dB    |
| VSWR                    |     |         | 1.2 | Ratio |
| Power Handling(average) |     |         | 30  | Watt  |

### ENVIRONMENTAL RATINGS:


| Parameter                          | Min   | Typical   | Max   | Units |
|------------------------------------|-------|-----------|-------|-------|
| Operating Temperature              | -40   |           | +80   | ℃     |
| Non-operating Temperature          | -40   |           | 85    | ℃     |
| Relative humidity (non-condensing) |       | 95        |       | %     |
| Altitude (MIL-STD-810F)            | 10000 |           | 30000 | Feet  |
| Shock / Vibration (MIL-STD-810F)   |       | Airbone   |       |       |
| ROHS                               |       | Compliant |       |       |

### MECHANICAL SPECIFICATIONS:

| Parameter            | Value      | Limits | Units     |
|----------------------|------------|--------|-----------|
| Dimensions(L*W*H)    | 75.5*48*36 | Max    | Milimeter |
| Weight               | 50         | Max    | gram      |
| RF Connectors Input  | Stripline  |        |           |
| RF Connectors output | Stripline  |        |           |
| Impedance            | 50         |        | Ohms      |

Other frequency bands&specifications are also available

### OUTLINE DRWAING(mm):

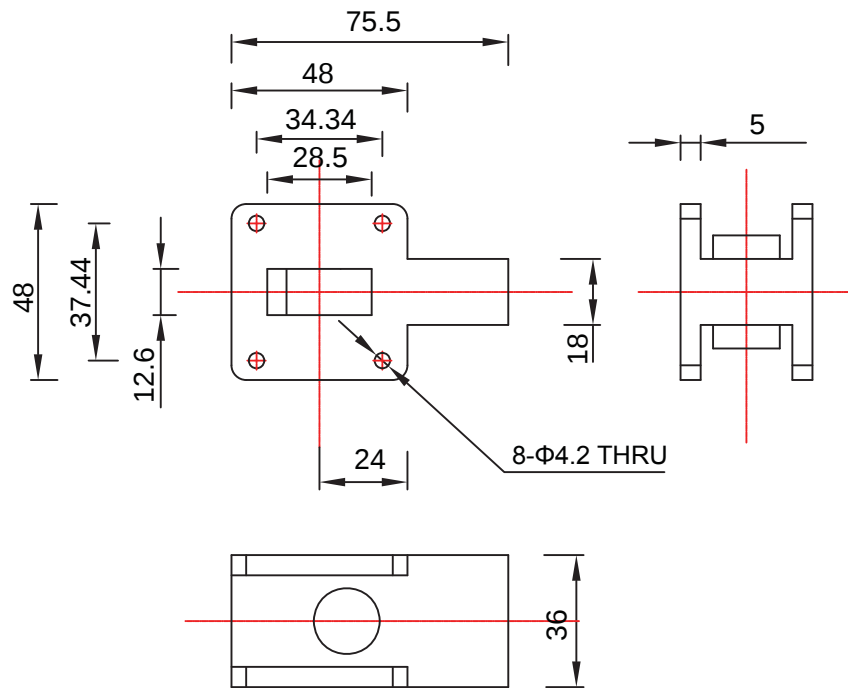

WS01

### HOW TO ORDER

WIS077084F-xx-xx

Low End Frequency(GHz)

High End Frequency(GHz)

Example: To order a 7.7-8.4GHz Isolator and specify WIS077084F-7.7-8.4