

FEATURES

- LOW Cost, High Quality
- Compact Size, Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

APPLICATIONS

- Load isolation
- Module integration



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	21.2		23.6	GHz
Band Width		2400		MHz
Insertion Loss			0.4	dB
Isolation	20			dB
VSWR			1.2	Ratio
Power Handling(average)			30	Watt

ENVIRONMENTAL RATINGS:


Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+85	°C
Non-operating Temperature	-40		+85	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	Feet
Shock / Vibration (MIL-STD-810F)		Airbone		
ROHS		Compliant		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions(L*W*H)	38.1*22.3*12.7	Max	Milimeter
Weight	50	Max	gram
RF Connectors Input	Stripline		
RF Connectors output	Stripline		
Impedance	50		Ohms

Other frequency bands&specifications are also available

OUTLINE DRWAING(mm):

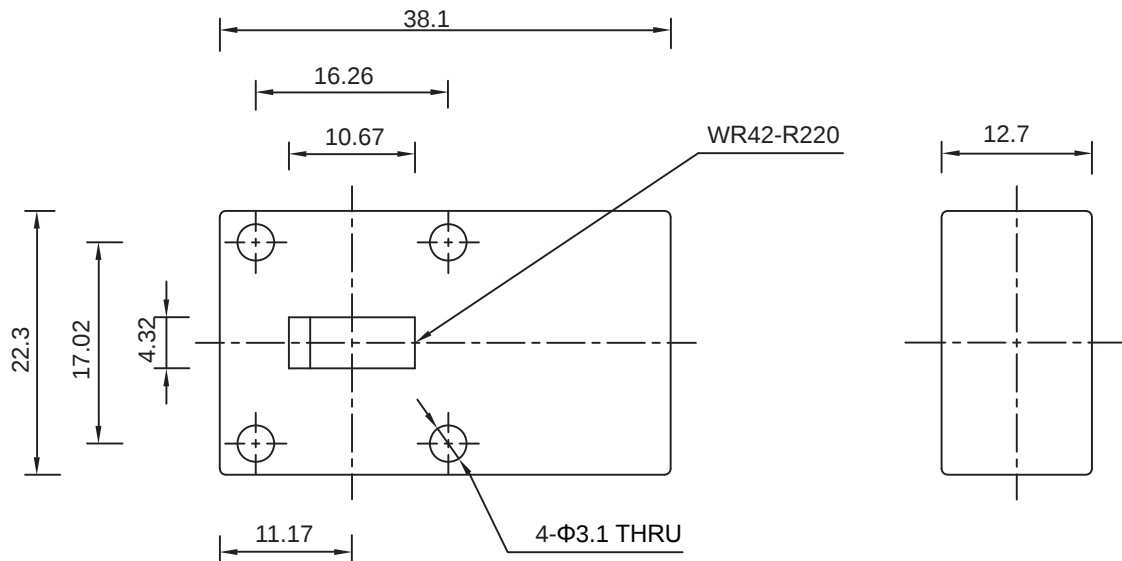

WS13

HOW TO ORDER

WIS212236A-xx-xx

Low End Frequency(MHz)

High End Frequency(MHz)

Example: To order a 21200-23600MHz Isolator and specif WIS212236A-21200-23600