



# WIDE BAND MEDIUM POWER AMPLIFIER

## MBM0206G3430

### FEATURES

- Wide Bandwidth
- Low Power Consumption
- Low Noise Figure
- Miniature Sizes, Field Removable connector
- Compact/Rugged Thin-Film Construction



### APPLICATIONS

- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics

### ELECTRICAL SPECIFICATIONS@25°C:

| Parameter                    | Min | Typical | Max | Units |
|------------------------------|-----|---------|-----|-------|
| Frequency Range              | 2   |         | 6   | GHz   |
| Small Signal Gain            | 34  |         |     | dB    |
| Small Signal Gain Flatness   |     |         | ±2  | dB    |
| Noise Figure                 |     |         | 5   | dB    |
| Output Power 1dB compression | 30  |         |     | dBm   |
| IP3                          |     |         |     | dBm   |
| VSWR                         |     |         | 2:1 | Ratio |
| DC Power Supply              |     | 15      |     | Volt  |
| Current                      |     | 1100    |     | mA    |

### ENVIRONMENTAL RATINGS:

| Parameter                          | Min   | Typical | Max   | Units |
|------------------------------------|-------|---------|-------|-------|
| Max Input power                    |       |         | +20   | dBm   |
| Operating Temperature              | -40   |         | +85   | °C    |
| Non-operating Temperature          | -55   |         | +125  | °C    |
| Relative humidity (non-condensing) |       | 95      |       | %     |
| Altitude (MIL-STD-810F)            | 10000 |         | 30000 | feet  |
| Shock / Vibration (MIL-STD-810F)   |       | Airbone |       |       |

### MECHANICAL SPECIFICATIONS:


| Parameter            | Value      | Limits | Units     |
|----------------------|------------|--------|-----------|
| Dimensions           | 46.4*45*16 | Max    | Milimeter |
| Weight               | 100        | Max    | gram      |
| RF Connectors Input  | SMA-F      |        |           |
| RF Connectors output | SMA-F      |        |           |
| Impedance            | 50         |        | Ohms      |

Note:miniature size,drop-in ,SMT and customized specification is also available



# WIDE BAND MEDIUM POWER AMPLIFIER MBM0206G3430

## OUTLINE DRAWING(mm):

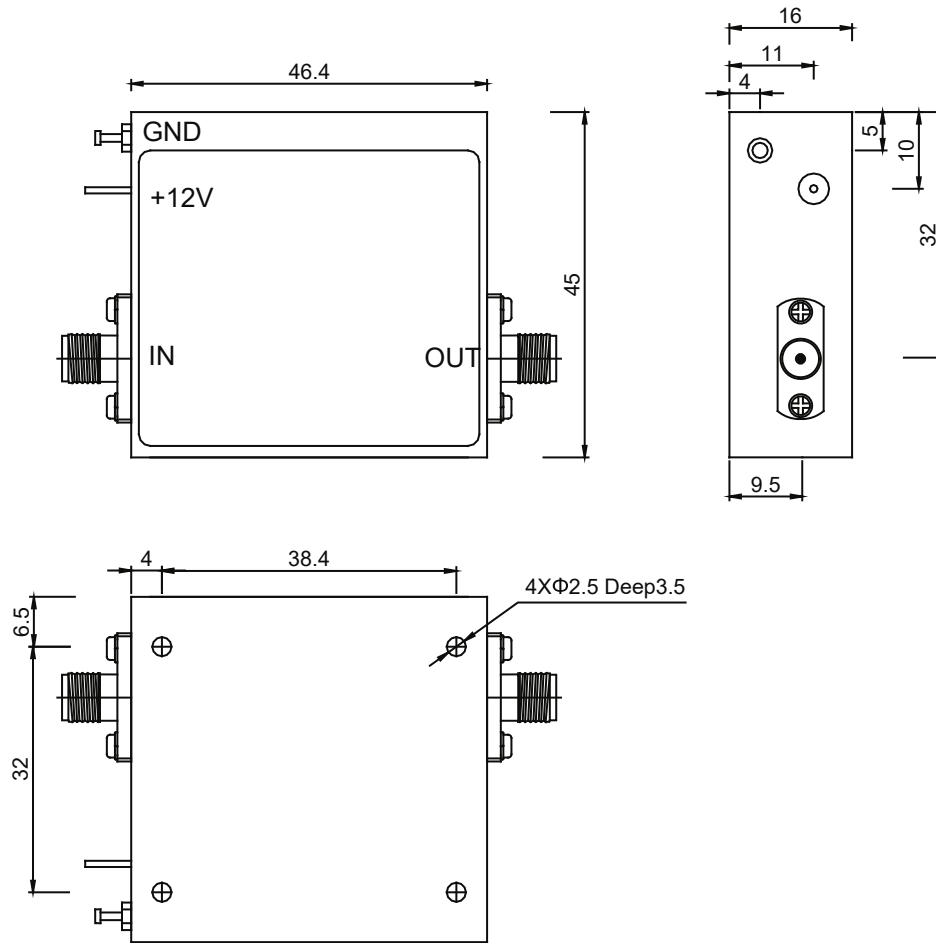

BH8