

FEATURES

- Whole Solid State, Mixture Integrated
- Low Power Consumption
- Excellent Flatness & Accuracy
- Miniature Sizes for drop-In available

APPLICATIONS

- Military & Space
- Radar & Electronic warfare
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	0.5		2	GHz
Insertion Loss			2	dB
Mean attenuation Range	0		30	dB
Step Size			2	dB
Control bits		4		bits
Attenuation accuracy			±1	dB
Speed			150	ns
Flatness		±0.3		dB
VSWR			1.8:1	Ratio
DC Power +5V		50		mA
DC Power -5V		50		mA


ENVIRONMENTAL RATINGS:

Parameter	Min	Typical	Max	Units
Max Input Power			27	dBm
Operating Temperature	-40		+70	°C
Non-operating Temperature	-55		85	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	feet
Shock / Vibration (MIL-STD-810F)		Airbone		
ROHS		Compliant		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	30*18*10		Millimeter
Weight	100	type	gram
RF Connectors Input	SMA-F removable		
RF Connectors output	SMA-F removable		
Impedance	50		ohms

OUTLINE DRAWING(mm):

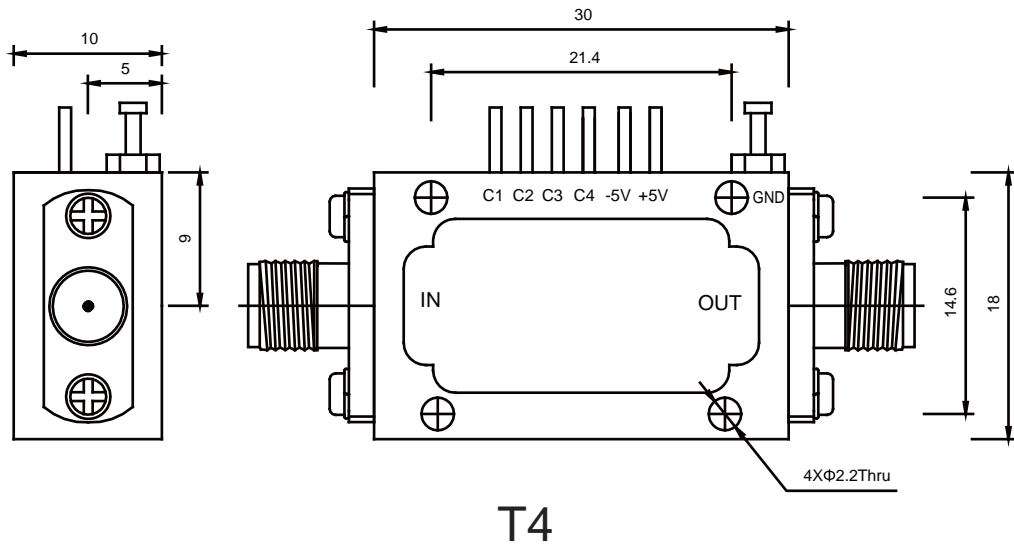

TEST DATA:

Frequency 0.5-2(GHz)										
IL(dB)		VSWR (Max)	Attenuation(dB)							
Min	Max		2		4		8		16	
1.66	1.9	1.3	1.96	2.02	3.94	3.97	7.82	7.85	15.71	15.73