

FEATURES

- DC-40GHz, up to 10kW
- Flatness Attenuation Value and Accuracy
- High Reliability, Repeatable Performance
- Anti-pulse and Anti-burnout
- Low IM3 Versions Available

APPLICATIONS

- Military & Space
- Radar&Electronic warfare
- Test Equipment



ELECTRICAL SPECIFICATIONS@25°C:


Part Number	Frequency Range(GHz)	Attenuation Value & Accuracy (dB)					Max VSWR
		1-9	10	20	30	40	
MFT040F002FXXL	DC-4	±0.3	±0.3	±0.4	±0.4	±0.5	1.20
MFT060F002FXXL	DC-6	±0.5	±0.4	±0.4	±0.5	±0.6	1.30
MFT080F002FXXL	DC-8	±0.5	±0.4	±0.4	±0.5	±0.6	1.30
MFT124F002FXXL	DC-12.4	±0.7	±0.7	±0.7	±0.7	±0.76	1.35
MFT180F002FXXL	DC-18	-0.4/+1.2	±1.0	±1.2	±1.2	±1.2	1.40

Note: XX refer to attenuation value in dB

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions	Φ20*77		Millimeter
Weight	80	type	gram
Operating Temperature	-55~+125		°C
Impedance	50		ohms

OUTLINE DRAWING(mm):

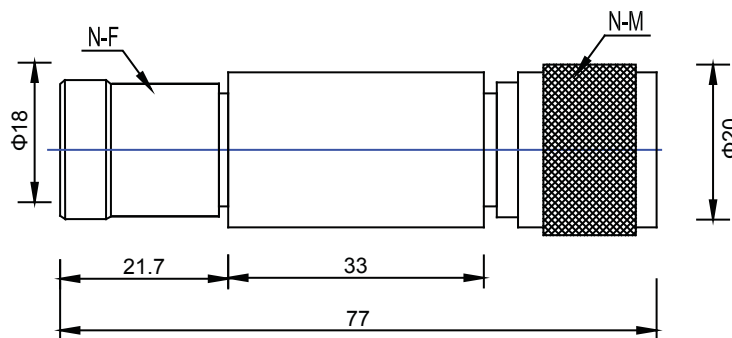

Note:

- 1.Average power: 2W a@ 25°C , 0.5W @ 125°C.
- 2.Peak power:0.5KW (5μs pulse width with 0.4% duty cycle)
- 3.Connector type: N, SMA , please remark commector type.Standard is N-male input ,N-F output.
- 4.Customized special attenuation value & accuracy is also available.