

FEATURES

- LOW Cost,High Quality
- Compact Size,Light Weight
- High Performance
- Wide Operation Temperature Range
- Octave and Multi-octave Bands

APPLICATIONS

- Load isolation
- Module integration



ELECTRICAL SPECIFICATIONS@25°C:

Parameter	Min	Typical	Max	Units
Frequency Range	27		29.5	GHz
Insertion Loss			0.5	dB
Isolation	18			dB
VSWR	18			dB
Power Handling(average)			5	Watt

ENVIRONMENTAL RATINGS:


Parameter	Min	Typical	Max	Units
Operating Temperature	-40		+80	°C
Non-operating Temperature	-40		85	°C
Relative humidity (non-condensing)		95		%
Altitude (MIL-STD-810F)	10000		30000	Feet
Shock / Vibration (MIL-STD-810F)		Airbone		
ROHS		Compliant		

MECHANICAL SPECIFICATIONS:

Parameter	Value	Limits	Units
Dimensions(L*W*H)	24*19.1*21	Max	Milimeter
Weight	100	Max	gram
RF Connectors Input	WR28		
RF Connectors output	WR28		
Impedance	50		Ohms

Other frequency bands&specifications are also available

OUTLINE DRAWING(mm):

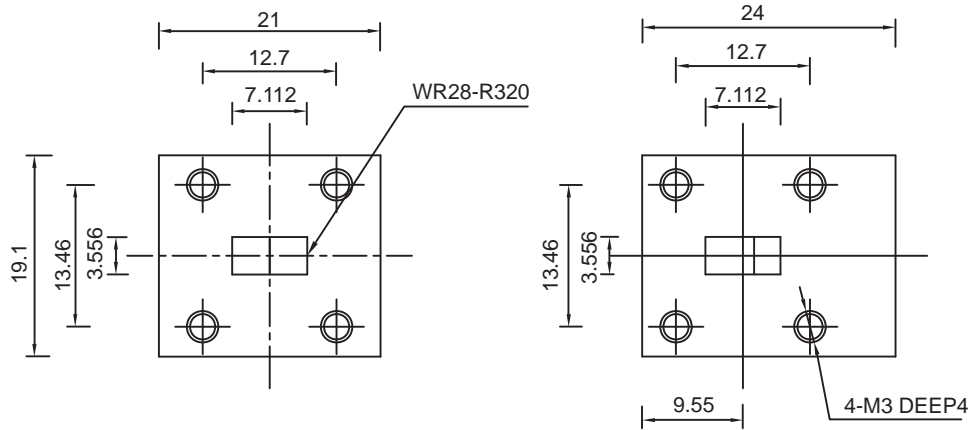

WR09